


# LZTKZQ-01

## Detailed Description


Performance	
InputVolts	Adapter:100V-240V AC 50/60Hz -5V DC
Select ballast type	315W/400W/600W/ 630W/750W/1000W/LED
Set output level	50-115%
Outputs	2
Temperature sensors	2
Number of ballasts per output	40
Total number of ballasts	80
External Contactor Modules	2 optional

Physical		
Case Length	104.8mm	4.13"
Case Width	86.4mm	3.40"
Height	34.3mm	1.35"
Weight	0.25kg	0.55lb

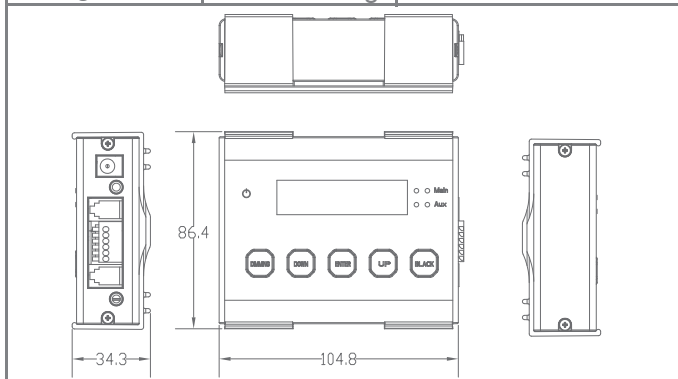


### Functions

- No need for a switchboard
- Easy and safe installation (low voltage device)
- Protected against shortcuts
- Double temperature safety feature
- For 100 ballasts or LEDS
- Show output as W or %
- Auto shutdown at set temp
- Sunrise/sunset period
- Alarm contacts NO/NC

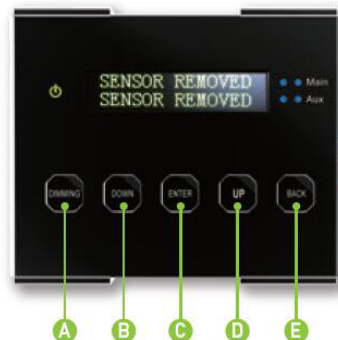

Controls		
Key	Function	
A	Dimming	View and adjust output level
B	Down	Navigate down in menu/decrease value
C	Enter	Go to menu/confirm
D	Up	Navigate up in menu/increase value
E	Back	Navigate back in menu/cancel/reset

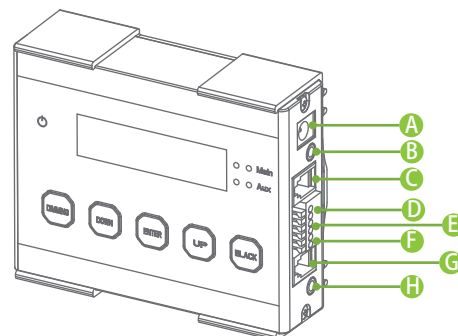

### Indications

- A. 5V DC input
- B. 3,5 mm jack main temperature sensor (T1)
- C. RJ9 (4P4C) Main port for controlling up to 40 ballasts
- D. Cage clamp connector EEM1 (output is active when main channel is on)
- E. Cage clamp connector EEM2 (output is active when main channel is off)
- F. Cage clamp alarm Normally Open (potential free contact)
- G. RJ9 (4P4C) Auxiliary port for controlling up to 40 ballasts or LEDS
- H. 3,5 mm jack auxiliary temperature sensor (T2)

### Gavita Master controllers

